

## Dash iN XS

### STANDARD

### HIGH TEMPERATURE


#### Functional Specifications

RF air protocol	EPC Class 1 Gen 2; ISO18000-6C
Operating frequency	UHF 902-928 MHz (US); 866-868 MHz (EU)
IC type	Alien Higgs-3
Memory configuration	96-bit EPC; 512-bit user memory; 64-bit TID
Functionality	Read / write (user programmed)
Memory – expected read / write cycles	100,000 cycles at 77°F (25°C)
Data retention	Up to 50 years <sup>1</sup>
Warranty (limited)	1 year

#### Environmental and Industry Compliance

RoHS&REACH	EU Directive 2011/65/EU, EC1907/2006
CE	Yes
ATEX/IECEX	Certified

#### Product Dimensions and Weight

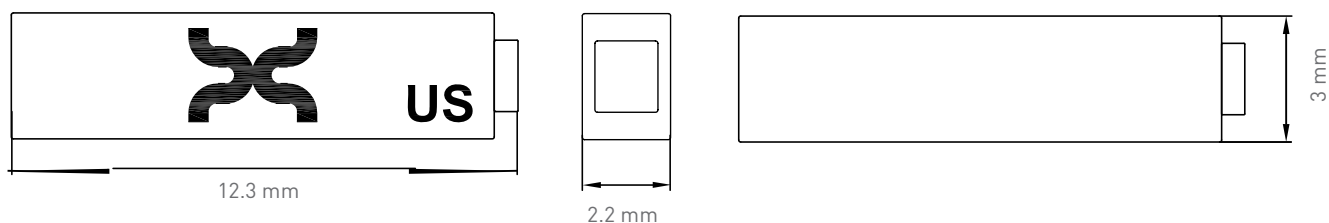

Dimensions (mm)	12.3 x 3 x 2.2
tolerance	+/- 0.3
Dimensions (in)	0.48 x 0.12 x 0.09
tolerance	+/- 0.012
Weight	0.016 oz (0.44 g)



## Dash-iN XS

**STANDARD**

**HIGH TEMPERATURE**



### Performance Characteristics

Read range in metal (2W ERP) <sup>2</sup>	Up to 5 ft (1.5 m)
Polarization	Linear

### Physical Specifications

Material	Ceramic
Mounting system	Epoxy, embedded
Paint color	White
Logo color	Green

### Operational and Environmental Specifications

Shock (drop)	3 ft (1 m) to concrete/granite up to 200 cycles
Vibration	MIL-STD-810G
Compression strength	Packaging dependent
IP classification	IP 68
Humidity	
Operational humidity	5%-95% non-condensing
Storage humidity	5%-95% non-condensing
Operational temperature	
Cold	-40°F (-40°C)
Dry heat	+185°F (+85°C)
Thermal shock	-40°F to 185°F (-40°C to +85°C); cycled

### STANDARD VERSION


Application temperature	
Cold	-40°F (-40°C)
Dry heat (Long term, hours/days)	+302°F (+150°C)
Dry heat (Short term, minutes)	+428°F (+220°C)

### HIGH TEMPERATURE VERSION

Application temperature*	
Cold	-40°F (-40°C)
Dry heat (Long term, hours/days)	+428°F (+220°C)
Dry heat (Short term, hours)	+482°F (+250°C) 6 hours
Peak temperature	+716°F (+380°C) less than 10 seconds

\*The tag performance in high temperature application depends on tag mounting method and environmental conditions.

## Radiation Pattern

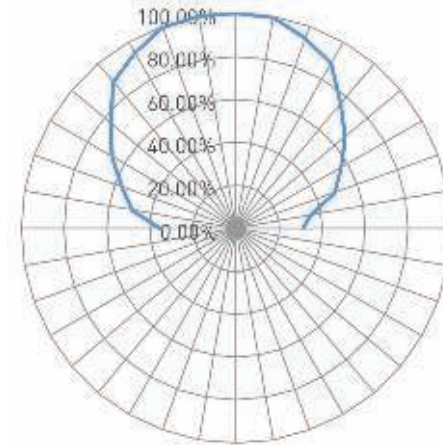

In metal

## Order information

X4201-US000-H3	Dash iN US Standard Version
X4201-EU000-H3	Dash iN EU Standard Version
X4201-US050-H3	Dash iN US High Temperature Version
X4201-EU050-H3	Dash iN US High Temperature Version

## Dash XS

**AUTOCLAVABLE**

For more information on Dash XS autoclavable version, please download [here](#) or contact us at [sales@xerafy.com](mailto:sales@xerafy.com)