




## XSKIN GAMMA

### Technical Specifications

- **RF protocol** EPC global Class 1 Gen 2
- **Frequency** 860-960 MHz (Global)
- **IC type (chip)**<sup>1</sup> Fujitsu
- **Chip memory** 160 bits EPC; 176 bits serialized TID
- **Read range fixed**<sup>2</sup> Up to 9.84 ft (3 m)
- **Read range handheld**<sup>2</sup> Up to 6.56 ft (2 m)
- **Polarization** Linear
- **Radiation pattern off metal**

Off metal-Horizontal / Vertical

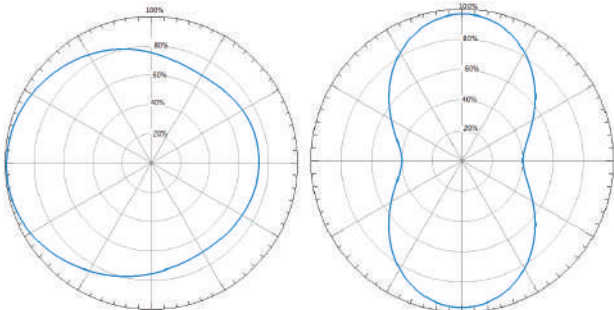

### Key Features

- + **Disposable:** withstand single e-beam and gamma sterilization
- + **Logistics ready:** up to 3 meters read range (off metal)
- + **UDI ready:** printable label for human and computer-readable information
- + **Global frequency:** integrates into the most complex supply chains
- + **Adhesive included:** for easy and quick attachment
- + **Converter ready:** designed for high volumes (1,000 labels per roll)

### Applications

- **Medical devices and equipment**
- **Medical supplies / PPE**
- **Pharmaceutical & biotech processing equipment**
- **Food processing / industry**

### Environmental Specifications

#### Temperatures



- Operational -40°C to +85°C
- Survival -40°C to +85°C

- **IP rating** IP54
- **Resistance compliance** Gamma (25 kGy), E-beam sterilization
- **Compression strength** 14 psi (97 kPa)
- **Vibration** MIL-STD-810G
- **Printer compatibility** Sato CL4NX, CT4-ex RF; Zebra ZD500R, ZT600, ZT400
- **Warranty** 1 year

<sup>1</sup> The chip data retention is up to 50 years, based on chip operating under general environment conditions.

<sup>2</sup> Off metal

## Physical Specifications


- **Material** White thermal transfer face stock
- **Dimensions (in)**<sup>1</sup> 2.95 x 0.79 x 0.01
- **Dimensions (mm)**<sup>1</sup> 75 x 20 x 0.20
- **Delivery format** On roll
- **Quantity per roll** 1,000
- **Weight (roll)** 1.43 lbs (0.65kg)

### Mounting Systems

- Industrial adhesive

### Installation Instructions

1. Clean the surface using Isopropyl alcohol, alcohol pad or equivalent solvent to ensure surface is free from dirt, dust, oil and misc, debris that may affect adhesion.
2. Handle the label by edges, peel release liner from back ensuring not to touch the adhesive.
3. Place the label in desired tagging location and firmly apply even pressure to the label for 5 seconds.
4. Do not disturb newly mounted label for at least 15 minutes to ensure proper adhesive seating.

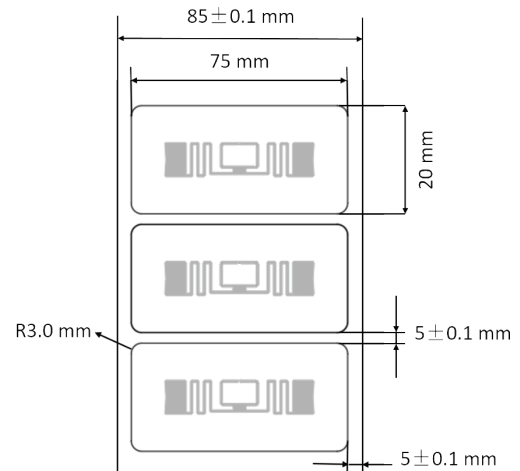

<sup>1</sup> Tolerance: +/- 0.02; +/- 0.50

## Industry Compliance



## Order Information

XSKIN Gamma: X6101-GL011-F1

### Customization Options

Encoding

Printing

The information provided by Xerafy Singapore Pte. Ltd. is for general information purposes only. All information on the datasheet is provided in good faith. However we make no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability, or completeness of any information on the datasheet.

Under no circumstance shall we have any liability to you for any loss or damage of any kind incurred as a result of the use of the product or reliance on any information provided on the datasheet. Your use of the product and your reliance on any information on the datasheet is solely at your own risk.

