

# METAL SKIN TITANIUM 48 LIQUID

## Technical Specifications

- **RF protocol** EPC global Class 1 Gen 2
- **Frequency** 902-928 MHz (US);  
865-868 MHz (EU)
- **IC type (chip)**<sup>1</sup> NXP UCODE 8
- **Chip memory**<sup>2</sup> 128 bits EPC; 96 bits TID
- **Read range fixed**<sup>3</sup>  
Up to 16.40 ft (5 m) on liquid  
Up to 6.56 ft (2 m) on metal
- **Read range off metal**<sup>3</sup> Up to 3.28 ft (1 m)
- **Polarization** Linear

## Key Features

- + **Small size:** fits small asset
- + **5m read range on liquid:** read on bottles or liquid container
- + **Printable:** human and computer-readable
- + **Flexible label:** for curved surfaces
- + **IP68 rating:** waterproof

## Applications

- Food and beverage
- Medicines and pharmacy
- Liquid bottles and containers

## Environmental Specifications

### Temperatures



- Operational -40°C to +85°C
- Survival -40°C to +85°C

- **IP rating** IP68
- **Storage Humidity** 50±15%RH
- **Printer compatibility** SATO CL4NX, Zebra ZT411R, Postek TX3r, TSC Printronix T6000e and T4000, etc.
- **Vibration** MIL-STD-810G
- **Warranty** 1 year


<sup>1</sup> The chip data retention is up to 50 years, based on chip operating under general environment conditions.

<sup>2</sup> EPC can be re-programmed or permanently locked, can not be password protected. TID is locked and unique at the point of manufacturing.

<sup>3</sup> Actual read range may vary based upon use case and antenna power.

## Physical Specifications

- **Material** White thermal transfer face stock
- **Dimensions (in)**<sup>1</sup> 1.89 x 0.16 x 0.04
- **Dimensions (mm)**<sup>1</sup> 48 x 4 x 1
- **Packaging** 1000pcs/roll
- **Weight (roll)** 1.76 lbs (0.80 kg)

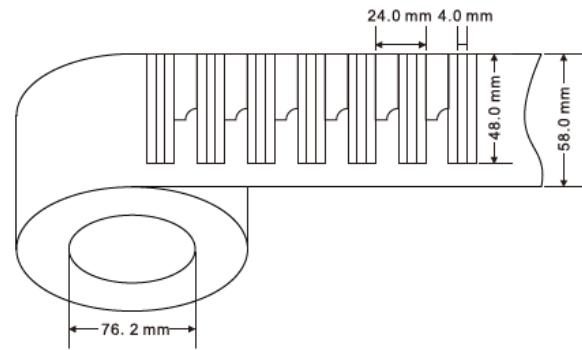

## Mounting Systems

- Industrial adhesive

## Installation Instructions

1. Clean the surface using Isopropyl alcohol, alcohol pad or equivalent solvent to ensure surface is free from dirt, dust, oil and misc, debris that may affect adhesion.
2. Handle the label by edges, peel release liner from back ensuring not to touch the adhesive.
3. Place the label in desired tagging location and firmly apply even pressure to the label for 5 seconds.
4. Do not disturb the newly mounted label for at least 15 minutes to ensure proper adhesive seating.

<sup>1</sup> Tolerance: +/- 0.02; +/- 0.50

<sup>2</sup> Tolerance: H=0.04(+/- 0.004); H=1(+/- 0.100)

## Industry Compliance



## Order Information

METAL SKIN Titanium 48 Liquid  
US: X4804-US011-U8

METAL SKIN Titanium 48 Liquid  
EU: X4804-EU011-U8

## Customization Options

Encoding

Printing

The information provided by Xerafy Singapore Pte. Ltd. is for general information purposes only. All information on the datasheet is provided in good faith. However we make no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability, or completeness of any information on the datasheet.

Under no circumstance shall we have any liability to you for any loss or damage of any kind incurred as a result of the use of the product or reliance on any information provided on the datasheet. Your use of the product and your reliance on any information on the datasheet is solely at your own risk.