



TEX 70x22 ROLL

Technical Specifications

- **RF protocol** EPC global Class 1 Gen 2; ISO18000-63
- **Frequency** 860-960 MHz (Global)
- **IC type(chip)¹** NXP UCODE 9xe
- **Chip memory²** 128 bits EPC; 96 bits TID
- **Write cycles** 100,000 Times
- **Data retention** 20 years
- **Read range fixed³**
Up to 19.69 ft (6 m) US
Up to 16.40 ft (5 m) EU
- **Read range handheld³**
Up to 15.75 ft(4.80 m) US
Up to 13.12 ft(4 m) EU
- **Polarization** Linear

Key Features

- + **Printable:** compatible with standard RFID printers
- + **On-roll:** support automated attachment processes
- + **200+:** industrial washing cycles
- + **EECC certified:** quality assurance
- + **Cost-effective:** for high volume

Applications

- **Medical scrubs**
- **Hospital linens**
- **Hotel linens**
- **Uniforms**
- **Rental costumes**

Environmental Specifications

Temperatures

- Operational -20°C to +85°C
-4°F to +185°F
- Washing: 90°C (194°F), 15 minutes
- Pre-drying: 180°C (356°F), 30 minutes
- Heat-sealing: 210°C (410°F), 20 seconds
- Ironing: 185°C (365°F), 10 seconds
- Sterilization process: 135°C (275°F), 20 minutes
- **Storage humidity** 8% - 95% RH
- **Mechanical resistance** 60 bars
- **Vibration** MIL-STD-810G

Chemicals⁴

- Standard detergents, fabric softeners, bleach, oxygen/chlorine compounds, alkali substances

- **Printer compatibility** TSC Printronix T6000e, Zebra ZT610R, SATO CL4NX, Postek TX3r, etc.
- **Warranty** 200 washing cycles or 3 years

¹ The chip data retention is up to 20 years, based on chip operating under general environment conditions.


² EPC can be re-programmed, password protected, or permanently locked. TID is locked and unique at the point of manufacturing.

³ Off metal, actual read range may vary based upon use case and antenna power.

⁴ The chemical resistance is based on the concentration of solutions and application environment. Please contact Xerfy for further details on chemical resistance.

Physical Specifications

- **Material** Polyester
- **Dimensions (in)**¹ 2.76 x 0.87
- **Dimensions (mm)**¹ 70 x 22
- **Thickness (in)**¹ 0.03 in, 0.04 in on chip location
- **Thickness (mm)**¹ 0.65 mm, 1 mm on chip location
- **Color** White
- **Weight** 0.53kg/roll
- **Package** 500pcs/roll
- **Washing method** Laundry, dry cleaning

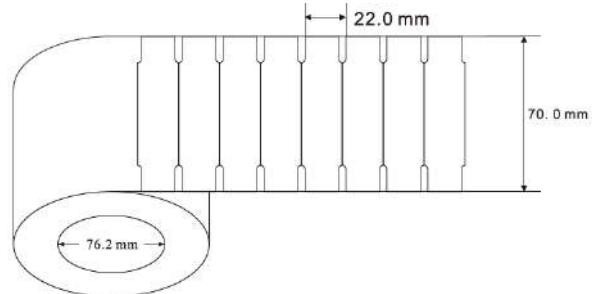

Mounting Systems

Sew or heat-seal based on specific requirements, with different product P/N selections

Installation Instructions

For detailed installation guidelines, refer to the Xerafy TEX guide

1. Install the tag by sewing:

Sew into a hem or inside a pocket of fabric

2. Install the tag by heat-sealing:

Seal the tag onto the textile at 210°C and 0.6-0.8 MPa for 20 seconds

¹ Tolerance: +/- 0.02; +/- 0.50

² Tolerance: H: +/- 0.004; H: +/- 0.100

Industry Compliance



Order Information

TEX 70x22 Roll (Sew): X7022-GL011-U9xe

TEX 70x22 Roll (Heat-seal): X7022-GL010-U9xe

Customization Options

Encoding

Printing

The information provided by Xerafy Singapore Pte. Ltd. is for general information purposes only. All information on the datasheet is provided in good faith. However we make no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability, or completeness of any information on the datasheet..

Under no circumstance shall we have any liability to you for any loss or damage of any kind incurred as a result of the use of the product or reliance on any information provided on the datasheet. Your use of the product and your reliance on any information on the datasheet is solely at your own risk.