

# XSKIN THETA ROLL

## Technical Specifications

- **RF protocol** ISO/IEC 18000-6C (EPC Gen2)
- **Frequency** 860-960 MHz (Global)
- **IC type(chip)**<sup>1</sup> NXP UCODE 9xm
- **User memory** 752/384 bits
- **EPC memory**<sup>2</sup> 128/496 bits
- **Write Cycles** 100,000 times
- **Data Retention** 20 years
- **Read range** off metal<sup>3</sup>  
Up to 26.25 ft (8 m) US  
Up to 19.69 ft (6 m) EU
- **Polarization** Linear

## Key Features

- + **200°C:** high-temperature RFID labeling for specialty process environments
- + **Printable:** roll format for high-volume deployment
- + **Customization:** configurable across chip, size, format, and encoding

## Applications

- Powder coating operations
- Paint shop workflows
- Composite curing processes
- Industrial autoclave workflows
- Battery production environments
- Medical devices and medical supplies

## Environmental Specifications

### Temperatures



- **OPERATIONAL** -40°C to +85°C
- **SURVIVAL** -40°C to +200°C for 30 mins, Short-Cycle exposure up to 134°C at 2.1 bar for 4 mins

- **Printer compatibility** ZEBRA (ZT411R), TSC (T6000e), SATO (CL4NX), POSTEK (TX3r).
- **Vibration** MIL-STD-810G
- **Warranty** 1 year


<sup>1</sup> The chip data retention is up to 20 years, based on chip operating under general environment conditions.

<sup>2</sup> EPC can be re-programmed, password protected, or permanently locked. TID is locked and unique at the point of manufacturing.

<sup>3</sup> Fixed reader. Actual read range may vary based upon use case and antenna power.

## Physical Specifications

- **Material** PI-based construction with durable paper face stock
- **Dimensions (in)**<sup>1</sup> 1.61 x 0.39
- **Dimensions (mm)**<sup>2</sup> 41 x 10
- **Packaging** 2,500 pcs/roll

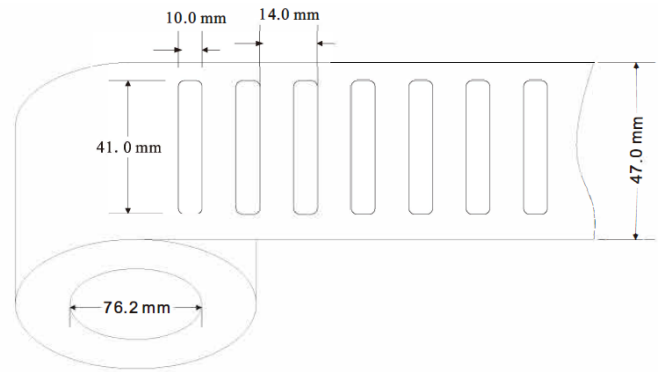

## Mounting Systems

- Industrial adhesive

## Installation Instructions

1. Clean the surface using Isopropyl alcohol, alcohol pad or equivalent solvent to ensure surface is free from dirt, dust, oil and misc, debris that may affect adhesion.
2. Peel a label off the release paper from the roll, ensuring not to touch the adhesive.
3. Place the label in desired tagging location and firmly apply even pressure to the label for 5 seconds.
4. Do not disturb the newly mounted label for at least 15 minutes to ensure proper adhesive seating.

<sup>1</sup> Tolerance: +/- 0.02; +/- 0.50

<sup>2</sup> Tolerance: H=0.04(+/- 0.004); H=1(+/- 0.100)

## Industry Compliance



## Order Information

XSKIN Theta Roll Global: X4110-GL011-U9xm

## Customization Options (Subject to MOQ)

**IC Chip:** NXP UCODE 9xe(128 bits EPC), Impinj M830(128 bits EPC)

**Service Bureau:** Printing and encoding available

**PET Inlay Construction:** Suitable for single-process heat exposure up to 200°C for 30 mins

**PET Formats:** Dry inlay (60mm reel width) or Wet inlay (50mm reel width), with inner core diameter: 76.2mm

The information provided by Xerafy Singapore Pte. Ltd. is for general information purposes only. All information on the datasheet is provided in good faith. However we make no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability, or completeness of any information on the datasheet.

Under no circumstance shall we have any liability to you for any loss or damage of any kind incurred as a result of the use of the product or reliance on any information provided on the datasheet. Your use of the product and your reliance on any information on the datasheet is solely at your own risk.