





METAL SKIN TITANIUM M830



Technical Specifications

- **RF protocol** EPC global Class 1 Gen 2
- **Frequency** 902-928 MHz (US);
865-868 MHz (EU)
- **IC type (chip)**¹ Impinj M830
- **Chip memory**² 128 bits EPC; 96 bits TID
- **Write cycles** 10,000 times
- **Data retention** 10 years
- **Read range on metal**³
Up to 11.48 ft (3.50 m) US
Up to 9.84 ft (3 m) EU
- **Read range off metal**³
Up to 6.56 ft (2 m) US
Up to 4.27 ft (1.30 m) EU
- **Polarization** Linear
- **Radiation pattern**

On metal-Horizontal / Vertical



Off metal-Horizontal / Vertical



Environmental Specifications

Temperatures



- Operational -40°C to +85°C
-40°F to +185°F
- Survival -40°C to +85°C
-40°F to +185°F

- **IP rating** IP68
- **Compression strength** 58 psi (400 kPa)
- **Printer compatibility** Zebra ZT411R, SATO CL4NX, Postek TX3r, TSC Printronix T6000e, etc.
- **Vibration** MIL-STD-810G
- **Warranty** 1 year

¹ The chip data retention is up to 10 years, based on chip operating under general environment conditions.

² EPC can be re-programmed or permanently locked, can not be password protected. TID is locked and unique at the point of manufacturing.

³ Actual read range may vary based upon use case and antenna power.

Key Features

- + **Small size:** fits small asset
- + **Printable:** human and computer-readable
- + **Flexible label:** for curved surfaces
- + **Cost effective:** for high volume
- + **IP68 rating:** waterproof

Applications

- **Retail item-level tagging**
- **Asset authentication**
- **Warehouse management**
- **IT asset tracking**
- **Luxury & high-value asset management**



Physical Specifications

- **Material** White thermal transfer face stock
- **Reel core material:** Cardboard
- **Reel core inner dimension:** 76.2mm/3(in)
- **Dimensions (in)¹** 1.77 x 0.22 x 0.04
- **Dimensions (mm)¹** 45 x 5.60 x 1
- **Packaging** 500pcs/roll
- **Weight (roll)** 0.88 lbs (0.40 kg)

Mounting Systems


- Industrial adhesive

Installation Instructions

1. Clean the surface using Isopropyl alcohol, alcohol pad or equivalent solvent to ensure surface is free from dirt, dust, oil and misc, debris that may affect adhesion.
2. Handle the label by edges, peel release liner from back ensuring not to touch the adhesive.
3. Place the label in desired tagging location and firmly apply even pressure to the label for 5 seconds.
4. Do not disturb the newly mounted label for at least 15 minutes to ensure proper adhesive seating.

¹ Tolerance: Length/Width= +/- 0.02; Thickness= +/- 0.008

² Tolerance: Length/Width= +/- 0.50; Thickness= +/- 0.200

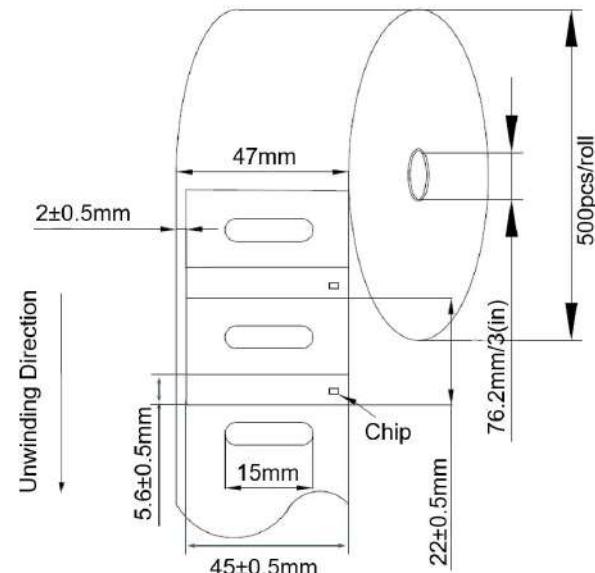

Industry Compliance



Order Information

METAL SKIN Titanium M830 US:
X5220-US011-M830

METAL SKIN Titanium M830 EU:
X5220-EU011-M830

Customization Options

Encoding

ATEX Certified Version

Printing

The information provided by Xerafy Singapore Pte. Ltd. is for general information purposes only. All information on the datasheet is provided in good faith. However we make no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability, or completeness of any information on the datasheet..

Under no circumstance shall we have any liability to you for any loss or damage of any kind incurred as a result of the use of the product or reliance on any information provided on the datasheet. Your use of the product and your reliance on any information on the datasheet is solely at your own risk.